


## ASSEMBLY INSTRUCTIONS

### READ CAREFULLY

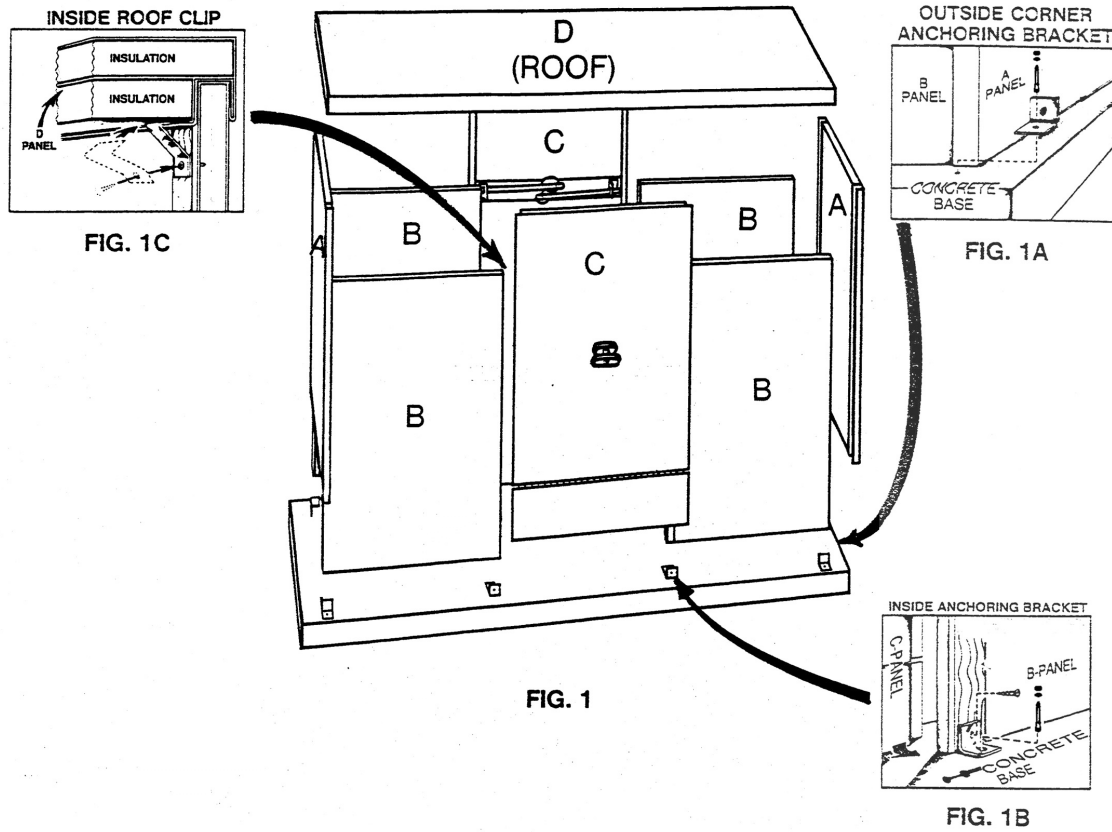


Model No.	Inside Dimensions	Outside Dimensions	Recommended Concrete Pad Dimensions
300DS-Series	48"W x 91"L x 44"H	51 3/4"W x 94 1/8"L x 47 1/4"H	62"W x 105"L x 6" Thick
300TDS-Series	48"W x 91"L x 50"H	51 3/4"W x 94 1/8"L x 53 1/4"H	62"W x 105"L x 6" Thick

1. Center a "6" thick concrete base around installed BFP.  
 A. Place expansion material around riser pipes and place conduit for electrical power before placing concrete. **CONCRETE SHOULD BE FINISHED ABSOLUTELY LEVEL, FLAT AND SMOOTH.** Allow concrete to cure.

B. Mark concrete with outside dimensions of enclosure. (Center around BFP).

2. Using four (4) hexhead screws for each section, assemble both "A-B" sections thru holes provided and set on marked concrete base (FIG 2).
3. Set "D" (roof) panel on "A-B" sections and using four (4) hexhead screws fasten thru holes provided.
4. A. Using one (1) hexhead screw attach **Outside Corner SS Anchoring Brackets** to "A-B" sections. Fasten bracket to concrete using one anchor for each bracket (FIG 1A). Use the masonry bit provided to drill a 3" hole in the concrete. Insert wedge anchor into this hole and strike the wedge anchor until it is secure in the concrete. Use the washer and nut provided to secure the anchor bracket.  
 B. Square the "A-B" corners. Align the "B" panels so that they form a straight line. Using one (1) hexhead screw and one (1) wedge anchor for each bracket attach **Inside Aluminum Anchoring Brackets** to "B" panels and concrete (FIG 1B). Repeat anchor bracket procedure from 4A.  
 C. Insert **Inside Roof Clips** in "D" (roof) panel. Using one (1) hexhead screw in each clip attach clip to "B" (side) panel (FIG 1C).

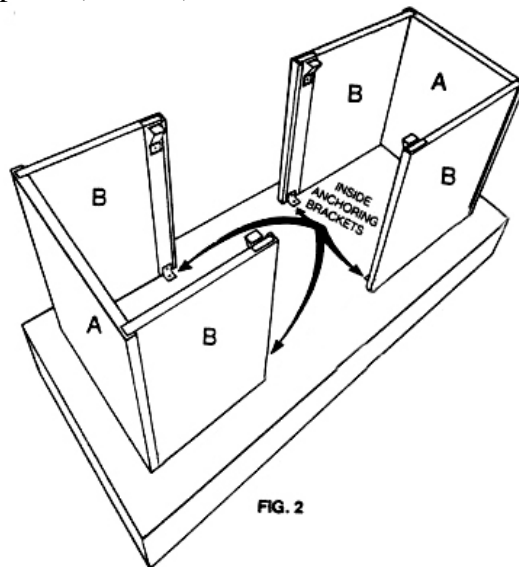

5. Set "C" panels and lock in place. (**Solid "C" panel to be ACCESS door**).
6. Provide ground-fault interrupter device in electrical circuit according to applicable codes. Install heater as per manufacturer's instructions and governing local and national codes.
7. For maximum protection it is suggested that the area between the bottom of the enclosure and the concrete base be caulked with the exception of the "C" panels. **DO NOT CAULK THE BOTTOM OF THE "C" DOOR PANELS.**

## REMOVE MASKING FILM IMMEDIATELY AFTER INSTALLATION

SAFE-T-COVER  
 1-800-245-6333  
 HCF300DS-2

**Model No. 300DS Series**  
**Model No. 300TDS Series**

**Contents**

- 2- "A" (end) Panels**
- 4- "B" (side) Panels**
- 1- "C" (drain door) Panel**
- 1- "C" (solid access) Panel**
- 1- "D" (roof) Panel**
- 4- Outside Corner SS Anchoring Brackets**  
**(1 1/2" x 1 1/2")**
- 4- Inside Aluminum Anchoring Brackets**  
**(3" x 3")**
- 4- Inside Roof Clips**
- 8- Wedge Anchors**
- 26- Screws**
- 1- Magnetic Chuck**

**TOOLS NEEDED**

**Hammer**

**Drill**

**9/16" Wrench**

**SAFE-T-COVER**  
**1-800-245-6333**  
**HCF300DS-4**